

# HDMI to HDMI + Audio Converter

**SEADA**  
Showing the World

User Manual

VER 1.0

## Dear Customer,

Thank you for purchasing this product.  
Please read this manual carefully before using the device. Keep the manual for future reference.

## Introduction

This converter extracts the audio signal from an HDMI source – ideal if you want to output audio separately to a surround sound system, active speakers, or headphones. It also enables you to utilize audio when connecting to HDMI monitors without built-in speakers.

## Feature

- No driver installation required (Plug & Play)
- Supports Full HD, 3D, and 4K@60Hz with YUV 4:4:4
- Supports HDCP 2.2 and High Dynamic Range (HDR)
- Supports CEC (Consumer Electronics Control)
- Supports ARC (Audio Return Channel)
- Switchable audio output: 2.0CH / 5.1CH / PASS
- Compatible with Dolby TrueHD and DTS-HD Master Audio™

Note: Dolby is a trademark of Dolby Laboratories.

Website: [www.seada.co.uk](http://www.seada.co.uk)

E-mail: [sales@seada.co.uk](mailto:sales@seada.co.uk)

## Specification

Input	HDMI
Output	HDMI + Audio (Toslink & 3.5 mm jack)
Video Amplifier Bandwidth	6.0Gbps/600MHz per channel
Video formats	480i/p, 576i/p, 720p, 1080i/p, 4K@30/60 Hz
Warranty	1 Year Manufacturer Warranty
Operating Temperature	0℃ to 70℃
Operating Humidity	10% to 85% RH (no condensation)
Storage Temperature	-10℃ to +80℃
Storage Humidity	5% to 90% RH (no condensation)
Power Supply	5V DC
Power Consumption	5W
Dimension( LxWxH)	78x60x21mm
Net Weight	120g

Note: Specification is subject to change without notice.

## Package Content

- 1 x Converter
- 1 x 5V 1A Power Adapter
- 1 x User Manual

Website: [www.seada.co.uk](http://www.seada.co.uk)

E-mail: [sales@seada.co.uk](mailto:sales@seada.co.uk)


## Ports and Interfaces



Website: [www.seada.co.uk](http://www.seada.co.uk)

E-mail: [sales@seada.co.uk](mailto:sales@seada.co.uk)

## Connection Diagram

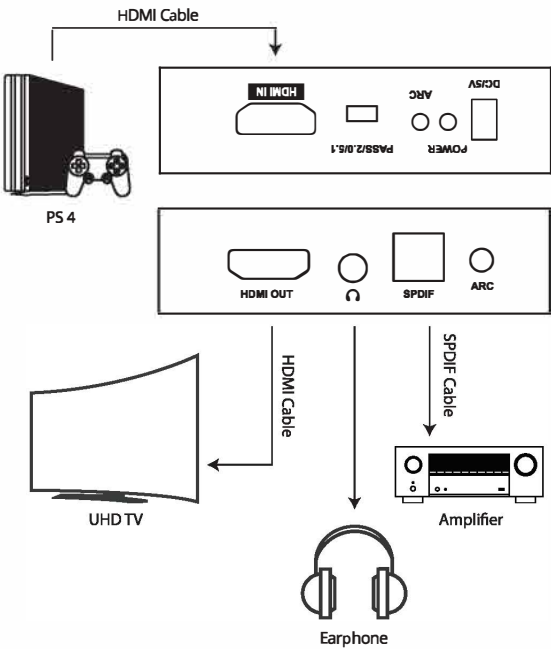

Website: [www.seada.co.uk](http://www.seada.co.uk)

E-mail: [sales@seada.co.uk](mailto:sales@seada.co.uk)

## Audio Output Notes

- If the input signal is 5.1-channel audio and the switch is set to "2.0CH", the converter outputs stereo (2-channel) audio via HDMI, Toslink, and 3.5 mm jack.
- If the switch is set to "5.1CH" and the input is 5.1-channel, multi-channel (5.1) audio is output only via HDMI and Toslink. The 3.5 mm jack is disabled in this case.
- If the input signal is stereo (2.0), audio is available on all outputs simultaneously.
- When set to "PASS", the audio format is automatically determined by the connected HDMI device depending on its capabilities.

Important: The actual output format depends on what the connected audio system can process.

## Safety Instructions

- Do not open the device – risk of electric shock.
- Repairs should only be carried out by qualified personnel.
- Protect from moisture and water.
- Do not expose to direct sunlight or heat.
- Keep away from heat sources (e.g., radiators, stoves).
- Do not place objects on the device.
- Use only accessories recommended by the manufacturer.
- Disconnect from the power supply during thunderstorms or when not in use for an extended period.

Website: [www.seada.co.uk](http://www.seada.co.uk)

E-mail: [sales@seada.co.uk](mailto:sales@seada.co.uk)